



SADEV[®]classic




CANOPIES

Arcade model - 4 or 6 points



Our canopies are made of **316 (A4) stainless steel**. Without glass.

Dimensions

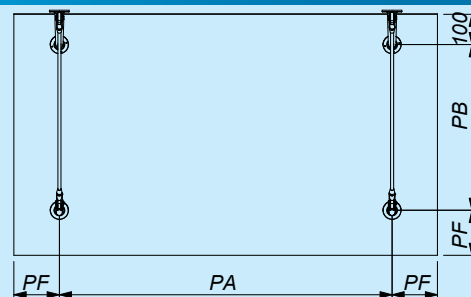


Glass thickness

	6.6	8.8	10.10	12.12
PA max for 4 points	1000	1300	1600	1900
PA max for 6 points	800	1000	1100	1300
PB max for 4 or 6 pts	700	1100	1300	1500
PF max	200	250	300	400

Max. glass dimension

2700
3400
2000


Glass drilling

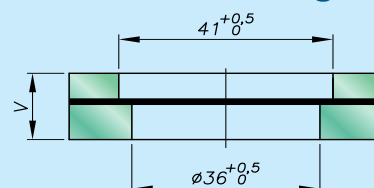


For further technical information, please refer to the technical catalogue.

Fittings


Bottom bracket




Top bracket




Gusset



Tension rod



Subassembly reference to order



$$B = 100 + PB + PF$$

	Ref. to order for 12.52 to 21.52 glass thickness	Ref. to order for 22 to 25.52 glass thickness
800 < B < 1000	13M10-1000-1221	13M10-1000-2225
1000 < B < 1200	13M10-1200-1221	13M10-1200-2225
1100 < B < 1400	13M12-1500-1221	13M12-1500-2225
1300 < B < 1600	13M12-1700-1221	13M12-1700-2225
1400 < B < 1800	13M12-2000-1221	13M12-2000-2225




Documentation introducing standard models - Our internal engineering office can design *tailor-made* models on request.

Corole model - 4 points



Our canopies are made of **316 (A4) stainless steel**. Without glass.

Dimensions

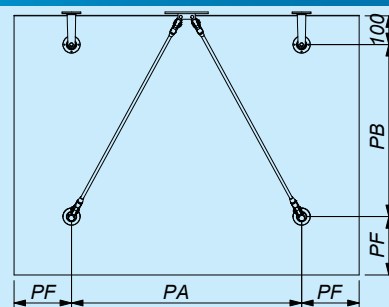


Glass thickness

	6.6	8.8	10.10	12.12
PA max for 4 points	1000	1300	1600	1900
PB max for 4 points	700	1100	1300	1500
PF max	200	250	300	400

Max. glass dimension


2700
2000

Glass drilling




For further technical information, please refer to the technical catalogue.


Fittings




Bottom bracket



Top double bracket



Gusset



Tension rod

Reference to order




Glass thickness	PA/PB	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800
	12 to 21 mm	500	13CORM10-1000-1221													
	600				13CORM10-1200-1221											
	700			13CORM12-1500-1221												
	800												13CORM12-1700-1221			
	900															
Glass thickness	PA/PB	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800
	500	13CORM10-1000-2225														
	600				13CORM10-1200-2225											
	700			13CORM12-1500-2225												
	800												13CORM12-1700-2225			
	900															

Evolutionary Plaza model



Our canopies are made of **316 (A4) stainless steel**. Without glass.

Dimensions

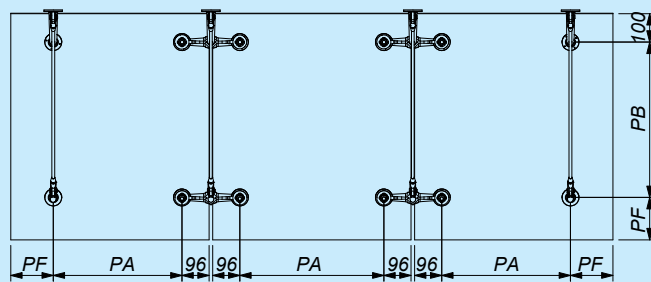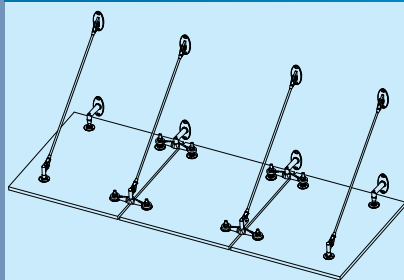


Glass thickness

	6.6	8.8	10.10	12.12
PA max for 4 points	1000	1300	1600	1900
PB max for 4 points	700	1100	1300	1500
PF max	200	250	300	400

Max. glass dimension

2700
2000

Glass drilling



For further technical information, please refer to the technical catalogue.

Fittings

Bottom bracket	Top bracket	Gusset	Bottom double bracket	Double gusset	Tension rod


Subassembly reference to order

	800 < B < 1000	Ref. to order for 12.52 to 21.52 glass thickness	Ref. to order for 22 to 25.52 glass thickness		800 < B < 1000	Ref. to order for 12.52 to 21.52 glass thickness	Ref. to order for 22 to 25.52 glass thickness
		13M10-1000-1221	13M10-1000-2225			13PLAM10-1000-1221	13PLAM10-1000-2225
	1000 < B < 1200	13M10-1200-1221	13M10-1200-2225		1000 < B < 1200	13PLAM10-1200-1221	13PLAM10-1200-2225
	1100 < B < 1400	13M12-1500-1221	13M12-1500-2225		1100 < B < 1400	13PLAM12-1500-1221	13PLAM12-1500-2225
	1300 < B < 1600	13M12-1700-1221	13M12-1700-2225		1300 < B < 1600	13PLAM12-1700-1221	13PLAM12-1700-2225
	1400 < B < 1800	13M12-2000-1221	13M12-2000-2225		1400 < B < 1800	13PLAM12-2000-1221	13PLAM12-2000-2225

B = 100 + PB + PF




Documentation introducing standard models - Our internal engineering office can design *tailor-made* models on request.

Light model - 4 points

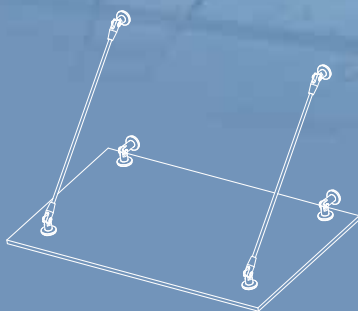

Our canopies are made of **316 (A4) stainless steel**. Without glass.

Dimensions

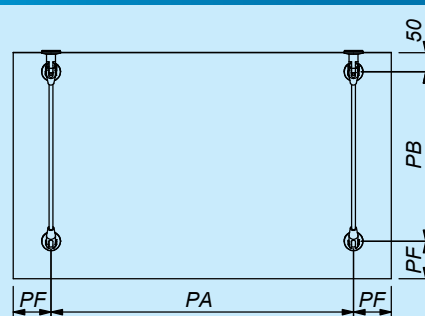


Glass thickness

	5.5	6.6
PA max	800	1000
PB max	700	800
PF max	200	250

Max. glass dimension

1500
1100


Glass drilling




For further technical information, please refer to the technical catalogue.

Fittings


Bottom bracket




Top bracket




Gusset



Tension rod



A single reference to order

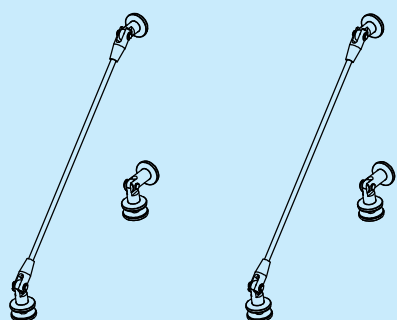

A 4 point canopy is available for a 5.5 to 6.6 glass thickness.

Reference: 131light

This is a standard kit, only available for the dimensions stated above.

For a tailor-made solution, please choose the equivalent on the **Arcade** model.

Bespoke glass canopies



Sadev can offer a feasibility study and basic structural calculation for your bespoke glass canopies based on EUROCODE.

Don't hesitate to ask for a quotation !

