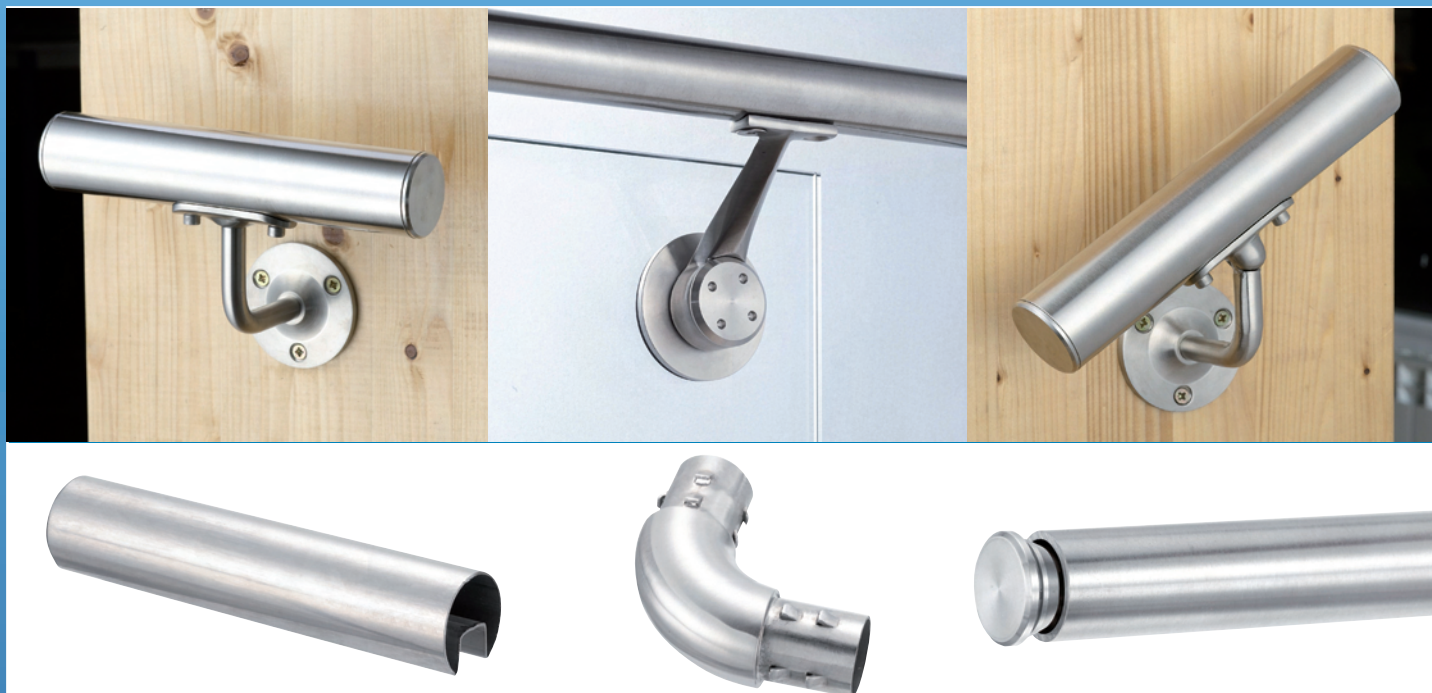


## Handrails technical page

Handrail

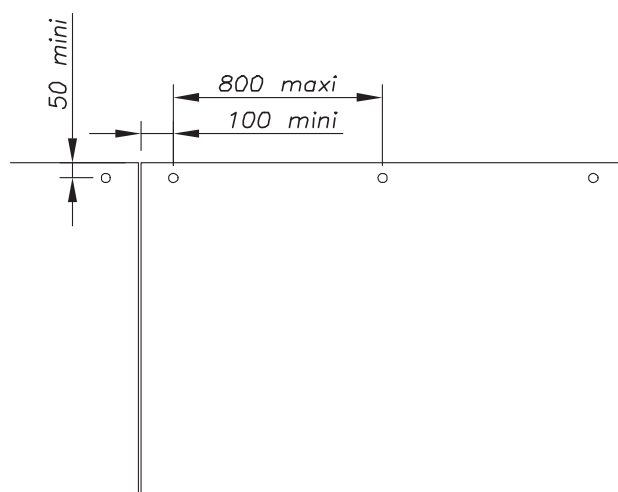
Model: 00 10

Handrail on wall or glass

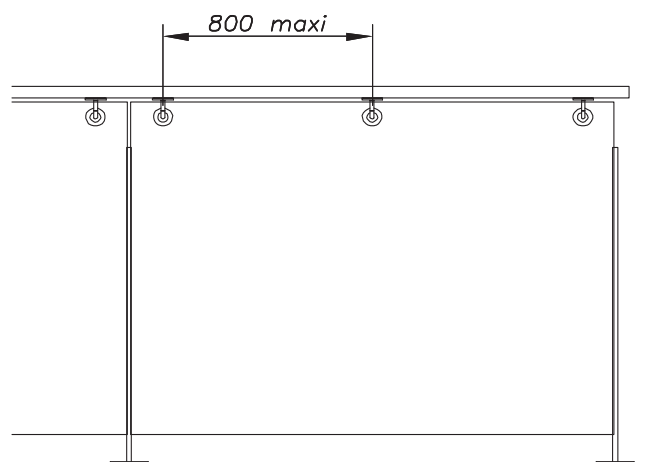


## Standard configuration and dimensions

## On glass



## On wall

**Maximum distance:**

800 mm between two posts

**Number of points:**

2 per glass panel at least

**Screws for glass:**

Countersunk or cylindrical, see following pages

**Recommendation / use****Glass thickness:**

from 12 mm to 25.52 mm


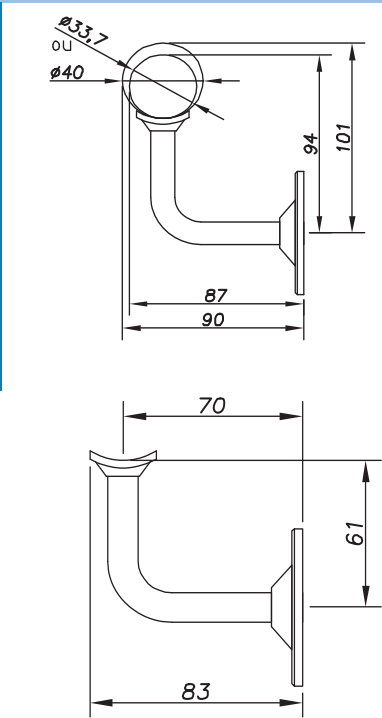
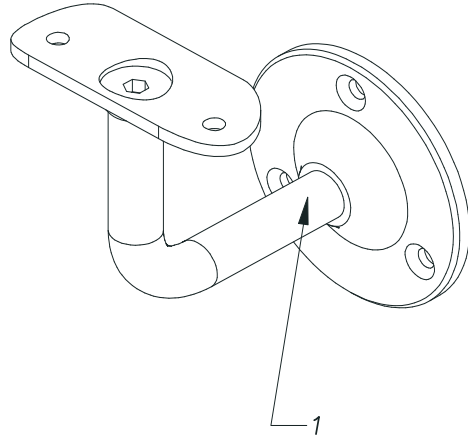
**Screws for the wall:** Countersunk head Ø 5, hexagonal Allen key (D7991), not supplied by SADEV. Anchor to be defined according to the nature of the wall. Not supplied by SADEV


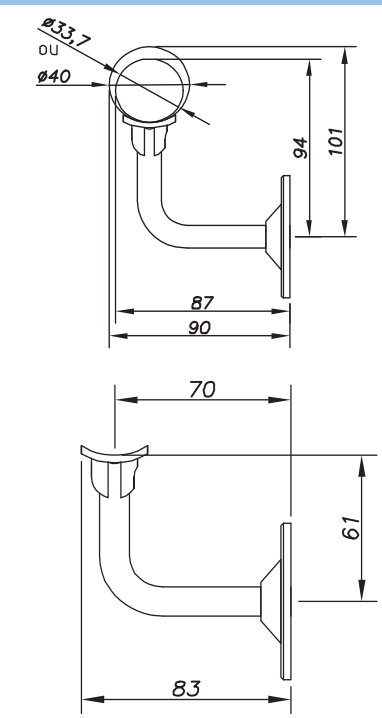
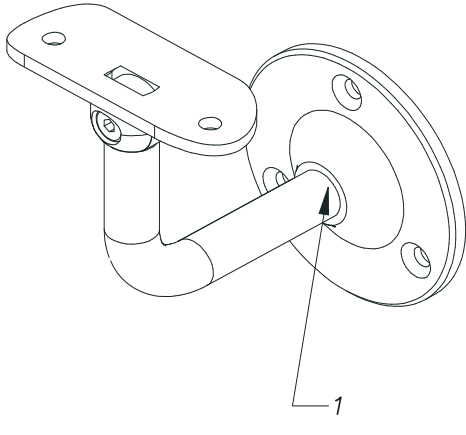
**Tightening of the glass screws:**

Monolithic tempered = Min. 15 N.m  
Laminated tempered = 10 N.m

If components are damaged they can be replaced by request.


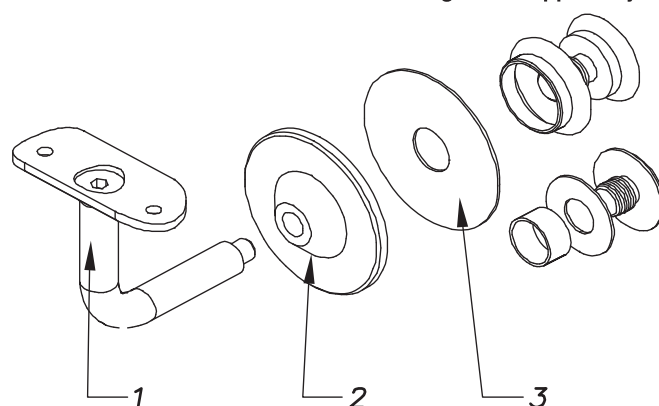
Order form end of this chapter.

<b>Model:</b>	<b>00 10 10 00</b>	<b>Handrail</b>			
<b>Description:</b>	<b>Fixed handrail for wall</b>				
		<p>Countersunk head Ø 5 for tube fixing</p>  <p>Countersunk head Ø 5 for wall fixing. Not supplied by SADEV</p> <p><b>Weight: 250 g</b></p> <p>Handrail (1)</p>			
<b>Reference</b>	<b>00 10 10 00</b>	<b>lead time (cf. page 1)</b>			
		<table><tr><td>Qty&lt;10</td><td>10&lt;Qty&lt;50</td><td>50&lt;Qty</td></tr></table>	Qty<10	10<Qty<50	50<Qty
Qty<10	10<Qty<50	50<Qty			

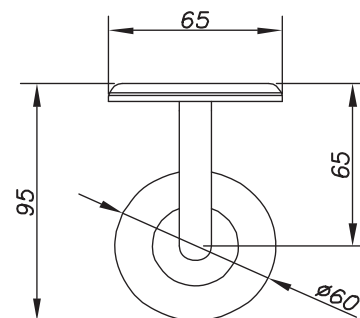

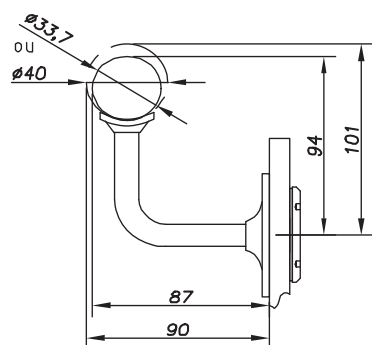
<b>Model:</b>	<b>00 10 15 00</b>			
<b>Description:</b>	Adjustable handrail for wall			
 <p>Finish: glass bead or brushed</p> 	<p>Countersunk head Ø 5 for tube fixing</p>  <p>Countersunk head Ø 5 for wall fixing. Not supplied by SADEV</p> <p>Handrail (1)</p> <p><b>Weight: 270 g</b></p>			
<b>Reference</b>	<b>00 10 15 00</b>	<b>lead time</b> (cf. page 1)		
		Qty<10	10<Qty<50	50<Qty

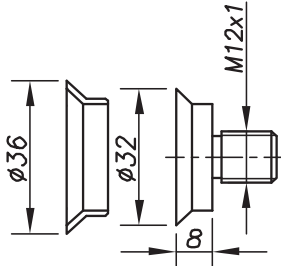
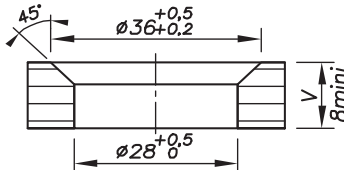
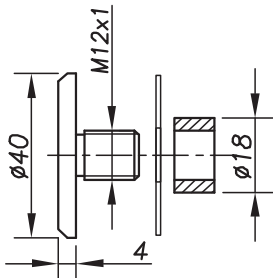
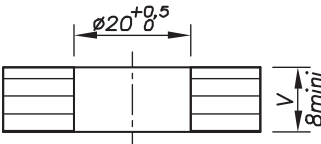
If components are damaged they can be replaced by request.

Order form end of this chapter.

<b>Model:</b>	<b>00 10 10 06</b>	<b>Handrail</b>
<b>Description:</b>	<b>Handrail on glass</b>	
	<p>Countersunk head screw Ø 5 for tube fixing – not supplied by SADEV</p>  <p>Tube support (1) Glass flange (2) Protective washer (3)</p> <p><b>Weight: 320 g</b></p>	
Finish: glass bead or brushed		

Finish: glass bead or brushed



Type of screw	Glass thickness	Reference	Glass drilling
	11.5 to 13.5	00 10 10 06 11 10 04	
	14 to 15.5	00 10 10 06 11 10 06	
	16 to 17.5	00 10 10 06 11 10	
	18 to 19.5	00 10 10 06 11 12	
	20 to 22	00 10 10 06 11 14	
	10 to 12	00 10 10 06 24 12	
	13 to 15.5	00 10 10 06 24 14	
	16 to 17.5	00 10 10 06 24 20	
	18 to 19.5	00 10 10 06 24 22	
	20 to 22	00 10 10 06 24 24	
lead time (cf. page 1)			
Qty<10	10<Qty<50	50<Qty	

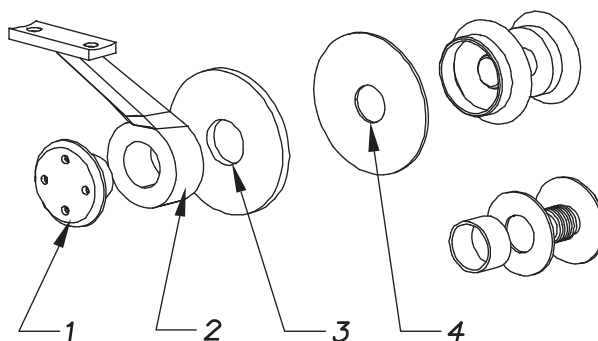
If components are damaged they can be replaced by request.

Order form end of this chapter.

<b>Model:</b>	<b>00 10 20 06</b>	<b>Handrail</b>
<b>Description:</b>	<b>Handrail on glass</b>	



Countersunk head screw  $\varnothing 4$  for tube fixing. Not supplied by SADEV

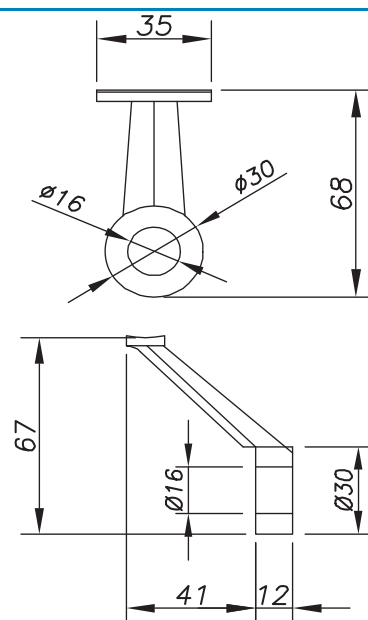
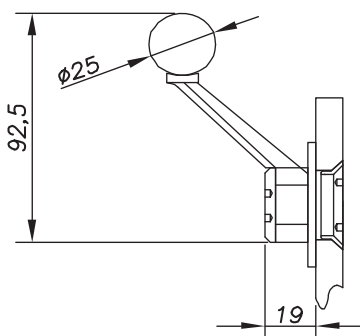


- Nut (1)
- Plate (2)
- Glass flange (3)
- Protective washer (4)

**Weight: 190 g**



Finish: glass bead or brushed



Type of screw	Glass thickness	Reference	Glass drilling
	<b>10 to 12</b>	00 10 20 06 11 16	
	<b>13 to 15.5</b>	00 10 20 06 11 16	
	<b>16 to 17.5</b>	00 10 20 06 11 20	
	<b>18 to 19.5</b>	00 10 20 06 11 20	
	<b>20 to 22</b>	00 10 20 06 11 24	
	<b>10 to 12</b>	00 10 20 06 24 24	
	<b>13 to 15.5</b>	00 10 20 06 24 24	
	<b>16 to 17.5</b>	00 10 20 06 24 32	
	<b>18 to 19.5</b>	00 10 20 06 24 32	
	<b>20 to 22</b>	00 10 20 06 24 36	


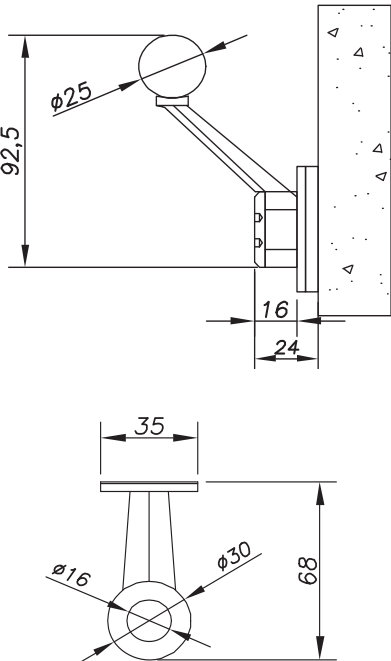
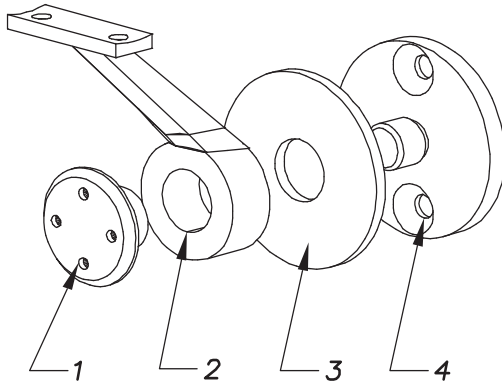
**lead time** (cf. page 1)


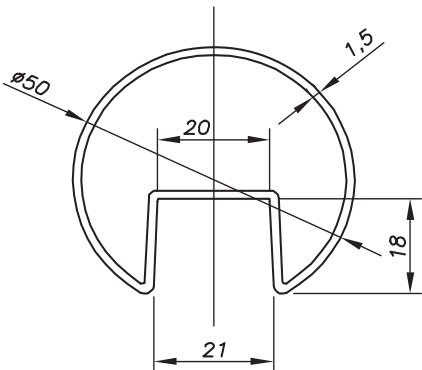
<b>Qty&lt;10</b>	<b>10&lt;Qty&lt;50</b>	<b>50&lt;Qty</b>
------------------	------------------------	------------------

If components are damaged they can be replaced by request.


**Order form end of this chapter.**



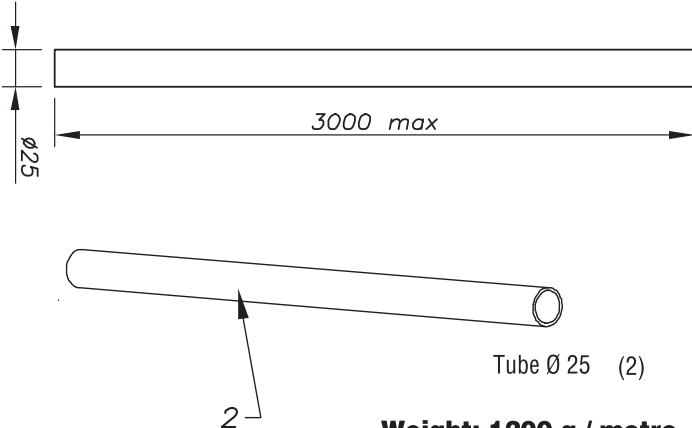
Model:	00 10 20 00	Handrail		
Description:	Handrail on wall			
 <p>Finish: glass bead or brushed</p>				
		<p>Countersunk head screw Ø 4 for tube fixing not supplied by SADEV</p>  <p>Nut (1) Plate (2) Wall flange (3) Wall plate (4)</p> <p>Countersunk head screw Ø 6 for wall fixing</p> <p><b>Weight: 230 g</b></p>		
Reference	00 10 20 00	lead time (cf. page 1)		
		Qty<10	10<Qty<50	50<Qty

<b>Model:</b>	<b>00 10 20 50</b>		
<b>Description:</b>	Ø 50 throat depth tube section		
		<p>Delivered in 2-metre multiple lengths or to measure. If it is cut to measure, a minimum of 2 / 4 / or 6 metres will be invoiced</p> <p>It is fitted with a silicone seal base or a seal for packing. Not supplied by SADEV</p>	
Finish: glass bead or brushed			
			
		<b>Weight: 11500 g / metre</b>	
<b>Reference</b>	<b>00 10 20 50</b>	<b>lead time</b> (cf. page 1)	
		Qty<10	10<Qty<50
			50<Qty

If components are damaged they can be replaced by request.  
**Order form end of this chapter.**

Model:	00 10 30 25		Handrail
Description:	Ø 25 stainless steel tube		
<div><p>Finish: glass bead or brushed</p></div>			
Length (M)	Reference		! Additional cost for transport !
2	00 10 30 25 200		
4	00 10 30 25 400		
6	00 10 30 25 600		
To measure	00 10 30 25 xxx		
lead time (cf. page 1)			
Qty<10	10<Qty<50	50<Qty	

Tube cap to be ordered separately





3000 max


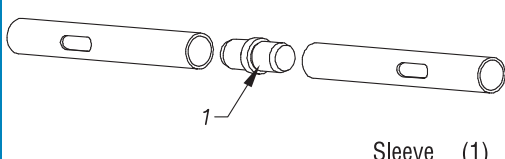
Ø25

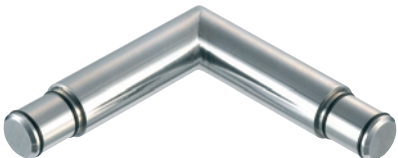
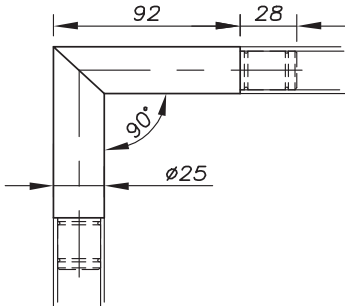
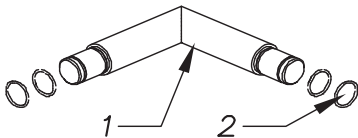
2

Tube Ø 25 (2)


Weight: 1200 g / metre

<b>Model:</b>	<b>05 53 55 555</b>											
<b>Description:</b>	Ø 25 stainless steel tube cap											
 <div>Finish: glass bead or brushed</div>	 <div>Cap (1)</div>	<div>Weight: 28 g</div> <table><tr><td colspan="2"><b>Reference</b></td><td><b>05 53 55 555</b></td></tr><tr><td colspan="3"><b>lead time</b> (cf. page 1)</td></tr><tr><td>Qty&lt;5</td><td>5&lt;Qty&lt;10</td><td>10&lt;Qty</td></tr></table>		<b>Reference</b>		<b>05 53 55 555</b>	<b>lead time</b> (cf. page 1)			Qty<5	5<Qty<10	10<Qty
<b>Reference</b>		<b>05 53 55 555</b>										
<b>lead time</b> (cf. page 1)												
Qty<5	5<Qty<10	10<Qty										

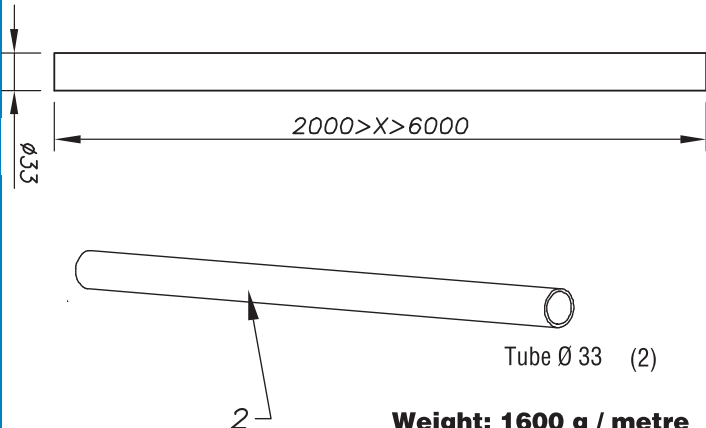
<b>Model:</b>	<b>05 54 55 50</b>		
<b>Description:</b>	Rail connector Ø 25		
	 <p>Sleeve (1)</p>		
Finish: glass bead or brushed	<p>For rail &gt; 3 metres</p> <p><b>Weight: 136 g</b></p>		
<b>Reference</b>		<b>05 54 55 50</b>	
<b>lead time</b> (cf. page 1)			
Qty<5		5<Qty<10	10<Qty

<b>Model:</b>	<b>02 05 02 29 50</b>		
<b>Description:</b>	<b>Fixed 90° Ø 25 tube-to-tube connector</b>		
			
Finish : glass bead or brushed		Fixed 90° connector (1) O-ring (2) <b>Weight: 770 g</b>	
<b>Reference</b>	<b>02 05 02 29 50</b>	<b>lead time</b> (cf. page 1)	
		Qty<5	5<Qty<15
			15<Qty

If components are damaged they can be replaced by request.  
**Order form end of this chapter.**

Model:	00 10 30 33			Handrail
Description:	Ø 33 stainless steel tube			
<div><p>Finish: glass bead or brushed</p></div>				
Length (M)		Reference		
2		00 10 30 33 200		
4		00 10 30 33 400		! Additional cost for transport !
6		00 10 30 33 600		
to measure		00 10 30 33 xxx		
lead time (cf. page 1)				
Qty<10		10<Qty<50		50<Qty

Tube cap to be ordered separately





2000 > X > 6000


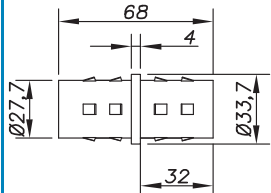

Ø 33


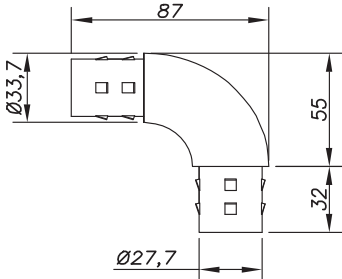
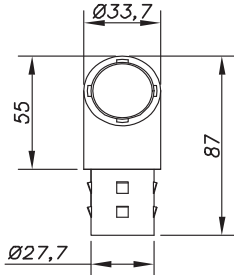
Tube Ø 33 (2)

2

Weight: 1600 g / metre


<b>Model:</b>	00 10 30 33 10		
<b>Description:</b>	Ø 33 stainless steel tube cap		
		Cap (1)	<b>Weight: 60 g</b>
Finish: glass bead or brushed			
	<b>Reference</b>	00 10 30 33 10	
	<b>lead time</b> (cf. page 1)		
	Qty<5	5<Qty<10	10<Qty

<b>Model:</b>	<b>00 10 30 33 20</b>			
<b>Description:</b>	Rail connector Ø 33			
			For rail > 3 metres	
			Weight: 68 g	
			<b>Reference</b>	00 10 30 33 20
			<b>lead time</b> (cf. page 1)	
Qty<5	5<Qty<10	10<Qty		

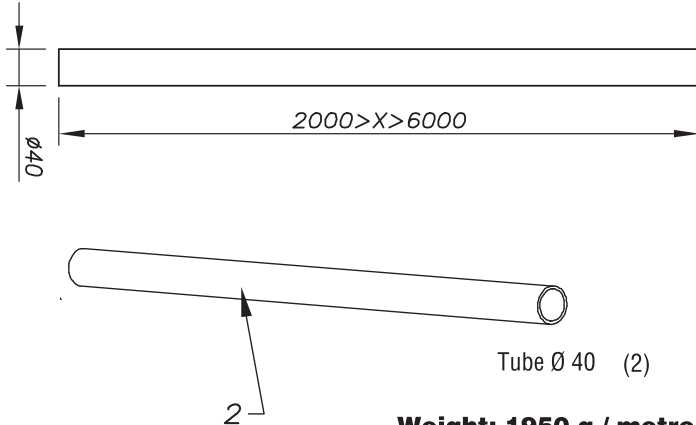
Model:	00 10 30 33 29		
Description:	Fixed 90° Ø 33 tube-to-tube connector		
		Weight: 258 g	
			
Reference	00 10 30 33 29	lead time (cf. page 1)	
		5<Qty<15	15<Qty

If components are damaged they can be replaced by request.

Order form end of this chapter.

Model:	00 10 30 40		Handrail
Description:	Ø 40 stainless steel tube		
<div><p>Finish: glass bead or brushed</p></div>			
Length (M)	Reference		! Additional cost for transport !
2	00 10 30 40 200		
4	00 10 30 40 400		
6	00 10 30 40 600		
to measure	00 10 30 40 xxx		
lead time (cf. page 1)			
Qty<10	10<Qty<50	50<Qty	

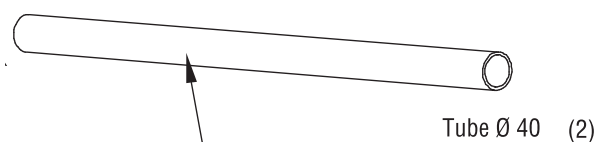
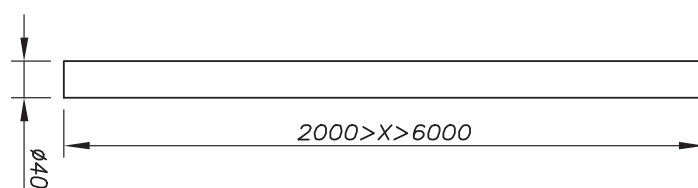
Tube cap to be ordered separately






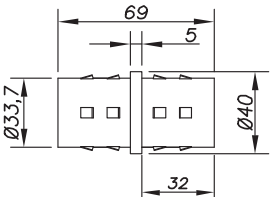

Tube Ø 40 (2)

Weight: 1950 g / metre


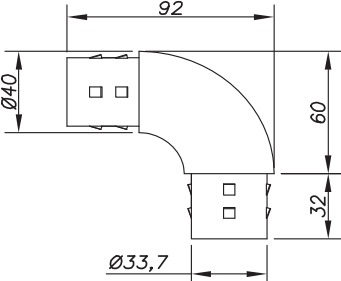
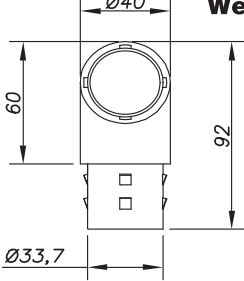
Tube cap to be ordered separately

**Weight: 1950 g / metre**

<b>Model:</b>	00 10 30 40 10			
<b>Description:</b>	Ø 40 stainless steel tube cap			
		Cap (1)	<b>Weight: 88 g</b>	
<p>Finish: glass bead or brushed</p>		<b>Reference</b>		00 10 30 40 10
		<b>lead time</b> (cf. page 1)		
		Qty<5	5<Qty<10	10<Qty

<b>Model:</b>	00 10 30 40 20				
<b>Description:</b>	Rail connector Ø 40				
					For rail > 3 metres
					<b>Weight: 85 g</b>
	<b>Reference</b>		00 10 30 40 20		
	<b>lead time</b> (cf. page 1)				
	Qty<5		5<Qty<10		10<Qty

For rail &gt; 3 metres

<b>Model:</b>	00 10 30 40 29			
<b>Description:</b>	Fixed 90° Ø 40 tube-to-tube connector			
				
				
		<b>Weight: 366 g</b>		
<b>Reference</b>	00 10 30 40 29		<b>lead time</b> (cf. page 1)	
		Qty<5	5<Qty<15	15<Qty

If components are damaged they can be replaced by request.

Order form end of this chapter.